

Justification:  
Instruction

**(Maintenance)**

# Private Owner Circular Letter 312 Issue 2

Title

## Greasing of Brake Beam Slides


This document is the property of  
Network Rail.

It shall not be reproduced in  
whole or in part, nor disclosed to  
a third party, without the written  
permission of the Owner.

© Copyright 2005 Network Rail.

### ENDORSEMENT & AUTHORISATION

Endorsed by:

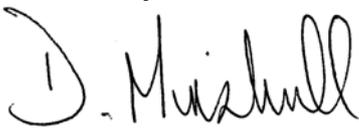

.....  
D. Minshull, Senior Standards Engineer

Authorised by:



.....  
K. Stannard, International Vehicle Engineer

**1. INTRODUCTION**

POCL 312 Issue 2 confirms the grease to use for lubricating the brake beam slides of bogie wagons.

**2. INSTRUCTION**

Brake beam ends (or slides supported in bogie side frames) shall be lubricated with a calcium based, graphited grease of number two consistency (BR Cat. No. 27/1361). The grease shall be applied between the side frame bearer support and the brake beam end.

**Note:** Where non-ferrous pads are fitted to the brake beam ends they shall not be lubricated.

**3. SCOPE**

This instruction applies to all PWRA vehicles that operate on Network Rail Controlled Infrastructure.

**4. IMPLEMENTATION**

This document shall be implemented immediately.

In the event of any query arising or clarification required, please contact:

Senior Standards Engineer  
PWRA Management Group  
Room 225 Derwent House  
rtc Business Park  
London Road  
Derby  
DE24 8UP